

Enhancing pseudo-telepathy in the Magic Square game

Lukasz Pawela,^{1,*} Piotr Gawron,^{1,†} Zbigniew Puchała,^{1,2,‡} and Jan Śladowski^{3,§}

¹*Institute of Theoretical and Applied Informatics,*

Polish Academy of Sciences, Bałtycka 5, 44-100 Gliwice, Poland

²*Institute of Physics, Jagiellonian University, Reymonta 4, 30-059 Kraków, Poland*

³*Institute of Physics, University of Silesia, Uniwersytecka 4, 40-007 Katowice, Poland*

(Dated: 05/10/2012 (v. 0.1))

We study the possibility of reversing an action of a quantum channel. Our goal is to find a specific channel that reverses as accurately as possible an action of a given quantum channel. To achieve this goal we use semidefinite programming. We show the benefits our method using the quantum pseudo-telepathy Magic Square game with noise. Our goal is to move the pseudo-telepathy region to higher noise parameter values α . We obtain results showing that it is possible to reverse the action of a noise channel using semidefinite programming.

PACS numbers: 03.67.ac, 03.67.-a, 03.65.aa, 03.65.ud, 02.50.Le

I. INTRODUCTION

Quantum game theory is a subclass of game theory that involves quantum phenomena. It lies at the crossroads of physics, quantum information processing, computer and natural sciences [1, 2].

Quantum pseudo-telepathy games [3], are a subclass of quantum games. A game belongs to the pseudo-telepathy class if there are no winning strategies for classical players, but a winning strategy can be found if the players share a sufficient amount of entanglement. In these games quantum players can accomplish tasks that are impossible for their classical counterparts. It has been shown [4], that noise in a quantum channel can decrease the probability of winning the Magic Square game, even below the classical threshold.

Noise is an unavoidable ingredient of a quantum system. Therefore its thorough investigation is a fundamental issue in quantum information processing. Quantum game theory has several potential applications (e.g quantum auctions [5]) that may be hindered by noise effects. Our previous investigation of quantum noise effects in quantum games [4, 6, 7], and quantum algorithms performance [8] revealed several interesting issues that act as an incentive of the present work. The tools developed in this work can be used to analyze the behavior of quantum channels in other settings.

This paper is organized as follows. In Section II we present the Magic Square game. In Section III we recall essential facts about quantum channels. In Section IV we discuss noisy quantum channels. In Section V we introduce a method of reversing an action of a channel. Section VI contains our results and their discussion. Finally, in Section VII the final conclusions are drawn.

II. MAGIC SQUARE GAME

The magic square is a 3×3 matrix filled with numbers 0 or 1 so that the sum of entries in each row is even and the sum of entries in each column is odd. Although such a matrix cannot exist (see Fig. 1) one can consider the following game.

1	1	0
1	0	1
1	0	?

FIG. 1: An illustrative filling of the magic square with numbers 0 and 1. The question mark shows that it is not possible to put a number in the last field and satisfy both conditions of the game.

The game setup is as follows. There are two players: Alice and Bob. Alice is given a row, Bob is given a column. Alice has to give the entries for a row and Bob has to give entries for a column so that the parity conditions are met. Winning condition is that the players' entries at the intersection must agree. Alice and Bob can prepare a strategy but they are not allowed to communicate during the game.

There exists a (classical) strategy that leads to winning probability of $\frac{8}{9}$ [3]. If parties are allowed to share a quantum state they can achieve probability equal to one.

In the quantum version of this game [9, 10] Alice and Bob are allowed to share an entangled quantum state. The winning strategy is following. Alice and Bob share an entangled state:

$$|\psi\rangle = \frac{1}{2} (|0011\rangle + |1100\rangle - |0110\rangle - |1001\rangle) \quad (1)$$

and apply local unitary operators forming operator $A_i \otimes B_j$, where

*Electronic address: lukasz.pawela@gmail.com

†Electronic address: gawron@iitis.pl

‡Electronic address: z.puchala@iitis.pl

§Electronic address: jan.sladowski@us.edu.pl

$$\begin{aligned}
A_1 &= \frac{1}{\sqrt{2}} \begin{pmatrix} i & 0 & 0 & 1 \\ 0 & -i & 1 & 0 \\ 1 & 0 & 0 & i \\ -1 & -1 & -1 & 1 \end{pmatrix}, & A_2 &= \frac{1}{2} \begin{pmatrix} i & 1 & 1 & i \\ -i & 1 & -1 & -i \\ i & 1 & -1 & -i \\ -i & 1 & 1 & -1 \end{pmatrix}, \\
A_3 &= \frac{1}{2} \begin{pmatrix} 1 & 1 & -1 & 1 \\ 1 & -1 & 1 & 1 \\ 1 & -1 & -1 & -1 \\ -1 & i & 1 & i \end{pmatrix}, & B_1 &= \frac{1}{2} \begin{pmatrix} -i & -i & 1 & -1 \\ -i & -i & 1 & -1 \\ 1 & 1 & -i & i \\ -i & i & 1 & 1 \end{pmatrix}, \\
B_2 &= \frac{1}{2} \begin{pmatrix} 1 & i & 1 & -i \\ 1 & -i & 1 & i \\ -1 & -i & 1 & -i \end{pmatrix}, & B_3 &= \frac{1}{\sqrt{2}} \begin{pmatrix} 1 & 0 & 0 & 1 \\ -1 & 0 & 0 & 1 \\ 0 & 1 & 1 & 0 \\ 0 & 1 & -1 & 0 \end{pmatrix}.
\end{aligned}$$

Indices i and j label rows and columns of the magic square. The state of this scheme before measurement is

$$\rho_f = (A_i \otimes B_j) |\psi\rangle\langle\psi| (A_i^\dagger \otimes B_j^\dagger). \quad (2)$$

The final step of the game consists of the measurement in the computational basis.

In [4] investigation was made for situation where the initial state $|\psi\rangle$ is corrupted by the noise. Therefore Eq. 2 is transformed into

$$\rho_f = (A_i \otimes B_j) \Phi_\alpha(|\psi\rangle\langle\psi|) (A_i^\dagger \otimes B_j^\dagger), \quad (3)$$

where Φ_α denotes one-parameter family of noisy quantum channels.

In such a case it is justified to ask what is the mean probability of Alice and Bob success given value of noise amount introduced by channel Φ_α . The probability of measuring the outcome yielding success in the state ρ_f , $p(\alpha)$ is given by

$$p(\alpha) = \sum_{i,j=1}^3 \sum_{\xi \in \mathcal{S}_{ij}} \text{tr} \rho_f |\xi\rangle\langle\xi|, \quad (4)$$

where $\mathcal{S}_{ij}$ is the set of right answers for the column and row ij (Tab. I).

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
$\mathcal{S}_{11}$	+	+	-	-	+	+	-	-	-	-	+	+	-	-	+	+
$\mathcal{S}_{12}$	+	+	-	-	-	-	+	+	+	+	-	-	-	-	+	+
$\mathcal{S}_{13}$	+	+	-	-	-	-	+	+	-	-	+	+	+	+	-	-
$\mathcal{S}_{21}$	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
$\mathcal{S}_{22}$	+	-	+	-	+	-	+	+	+	+	-	-	-	+	-	+
$\mathcal{S}_{23}$	+	-	+	-	+	-	+	+	+	-	+	+	+	-	+	-
$\mathcal{S}_{31}$	-	+	+	-	+	+	+	-	+	-	+	+	-	-	-	+
$\mathcal{S}_{32}$	-	+	+	+	-	-	+	+	+	+	-	+	-	+	-	+
$\mathcal{S}_{33}$	-	+	+	+	-	-	+	+	+	-	+	-	+	+	+	-

TABLE I: Sets $\mathcal{S}_{ij}$ — plus sign (+) indicates that the given element belongs to the set, minus (-) sign indicates that the element does not belong to the set.

A winning strategy exists for noiseless channels. In the case of noisy channel, the same strategy gives a higher probability of winning than in the classical case for low noise channels [4]. The goal of this work is to find local channels that partially reverse the action of the noise and therefore extends the pseudo-telepathy to channels with higher noise. In order to achieve it Eq. 3 is transformed into

$$\rho_f = (A_i \otimes B_j) \Psi_\alpha(\Phi_\alpha(|\psi\rangle\langle\psi|)) (A_i^\dagger \otimes B_j^\dagger), \quad (5)$$

where Ψ_α denotes local channel with respect to Alice and Bob's subsystems that allows to raise their probability of winning $p(\alpha)$. In order to achieve that a series of semi-definite optimization programs has to be numerically solved.

III. QUANTUM CHANNELS

In the most general case, the evolution of a quantum system can be described using the notion of a *quantum channel* [11–13]. A quantum channel is a mapping acting on density operators $\rho \in D(\mathcal{H})$ where $\rho \geq 0$ and $\text{tr}(\rho) = 1$ on a Hilbert space $\mathcal{H}_1$ and transforming them into operators on another Hilbert space $\mathcal{H}_2$. Thus

$$\Phi : L(\mathcal{H}_1) \rightarrow L(\mathcal{H}_2), \quad (6)$$

where $L(\mathcal{H}_i)$ denotes the set of linear operators on $\mathcal{H}_i$. To form a proper quantum channel, the mapping Φ must satisfy the following restrictions:

1. Φ must be *trace-preserving*, that is $\text{tr}(\Phi(\rho)) = \text{tr}(\rho)$,
2. Φ must be *completely positive*, that is $\Phi \otimes \mathbb{1}_{L(\mathcal{H}_3)}$ is a positive mapping, thus

$$(\Phi \otimes \mathbb{1}_{L(\mathcal{H}_3)})(\rho) \in D(\mathcal{H}_2 \otimes \mathcal{H}_3), \quad (7)$$

for every choice of $\rho \in D(\mathcal{H}_1 \otimes \mathcal{H}_3)$, where $\mathbb{1}_{L(\mathcal{H}_3)}$ is an identity channel on the space $L(\mathcal{H}_3)$.

The notion of a *product* quantum channel is introduced as follows [14]. For any choice of quantum channels that satisfy

$$\Phi_1 : L(\mathcal{H}_1^1) \rightarrow L(\mathcal{H}_2^1), \dots, \Phi_N : L(\mathcal{H}_1^N) \rightarrow L(\mathcal{H}_2^N), \quad (8)$$

we define a linear mapping

$$\Phi_1 \otimes \dots \otimes \Phi_N : L(\mathcal{H}_1^1 \otimes \dots \otimes \mathcal{H}_1^N) \rightarrow L(\mathcal{H}_2^1 \otimes \dots \otimes \mathcal{H}_2^N), \quad (9)$$

to be the unique mapping that satisfies the equation

$$(\Phi_1 \otimes \dots \otimes \Phi_N)(A_1 \otimes \dots \otimes A_N) = \Phi_1(A_1) \otimes \dots \otimes \Phi_N(A_N), \quad (10)$$

for all operators $A_1 \in L(\mathcal{H}_1^1), \dots, A_N \in L(\mathcal{H}_1^N)$.

Many different representations of quantum channels can be chosen, depending on the application. Among these are the Jamiołkowski representation and the Kraus representation. These two representations will be used throughout this paper.

The Jamiołkowski representation of a quantum channel Φ is given by

$$\mathcal{J}(\Phi) = \sum_{a,b} \Phi(E_{a,b}) \otimes E_{a,b}, \quad (11)$$

where $E_{a,b} \in L(\mathcal{H}_1)$ are operators with all entries equal to zero, except the entry a, b equal to one. From this

definition, it is straightforward to notice that $\mathcal{J}(\Phi) \in L(\mathcal{H}_2 \otimes \mathcal{H}_1)$. By the Choi's [11] theorem a channel is completely positive if and only if $\mathcal{J}(\Phi) \geq 0$. It is trace-preserving if and only if

$$\text{tr}_{\mathcal{H}_2}(\mathcal{J}(\Phi)) = \mathbb{1}_{\mathcal{H}_1}. \quad (12)$$

Finally, the action of a quantum channel in the Jmiołkowski representation is given by

$$\Phi(\rho) = \text{tr}_{\mathcal{H}_1}(\mathcal{J}(\Phi)(\mathbb{1}_{\mathcal{H}_2} \otimes \rho^T)). \quad (13)$$

The Kraus representation of a quantum channel is given by a set of operators $E_k \in L(\mathcal{H}_1, \mathcal{H}_2)$. The action of quantum channel Φ is given by:

$$\Phi(\rho) = \sum_k E_k \rho E_k^\dagger. \quad (14)$$

This form ensures that the quantum channel is completely positive. For it to be also trace-preserving we need to impose the following constraint on the Kraus operators

$$\sum_k E_k^\dagger E_k = \mathbb{1}_{\mathcal{H}_1}. \quad (15)$$

For further discussion of quantum channels see *e.g.* [12] or [14].

IV. QUANTUM NOISE

In the literature, several one-parameter families of qubit noisy channels are discussed [12]. For all the families of channels listed below the parameter $\alpha \in [0, 1]$ represents the amount of noise introduced by the channel. The symbols $\sigma_x, \sigma_y, \sigma_z$ denote Pauli operators. The Kraus operators for typical noisy channels are for

- depolarising channel: $\left\{ \sqrt{1 - \frac{3\alpha}{4}} \mathbb{1}, \sqrt{\frac{\alpha}{4}} \sigma_x, \sqrt{\frac{\alpha}{4}} \sigma_y, \sqrt{\frac{\alpha}{4}} \sigma_z \right\},$
- amplitude damping: $\left\{ \begin{smallmatrix} 1 & 0 \\ 0 & \sqrt{1-\alpha} \end{smallmatrix}, \begin{smallmatrix} 0 & \sqrt{\alpha} \\ 0 & 0 \end{smallmatrix} \right\},$
- phase damping: $\left\{ \begin{smallmatrix} 1 & 0 \\ 0 & \sqrt{1-\alpha} \end{smallmatrix}, \begin{bmatrix} 0 & 0 \\ 0 & \sqrt{\alpha} \end{bmatrix} \right\},$
- phase flip: $\left\{ \sqrt{1-\alpha} \mathbb{1}, \sqrt{\alpha} \sigma_z \right\},$
- bit flip: $\left\{ \sqrt{1-\alpha} \mathbb{1}, \sqrt{\alpha} \sigma_x \right\},$
- bit-phase flip: $\left\{ \sqrt{1-\alpha} \mathbb{1}, \sqrt{\alpha} \sigma_y \right\}.$

In order to apply noise operators to multiple qubits we form new set of operators acting on a larger Hilbert space.

Given a set of n one-qubit Kraus operators $\{e_k\}_{k=1}^n$ it is possible to construct new set of n^N operators $\{E_k\}_{k=1}^{n^N}$ that act on a Hilbert space of dimension 2^N by taking

Cartesian product of one-qubit Kraus operators in the following way

$$\{E_k\}_{k=1}^{n^N} = \{e_{i_1} \otimes e_{i_2} \otimes \dots \otimes e_{i_N}\}_{i_1, i_2, \dots, i_N=1}^n. \quad (16)$$

Application of the above to Kraus operators listed before gives one-parameter families of local noisy channels. This form will be used in further investigations.

V. REVERSING THE ACTION OF A CHANNEL

We propose the following scheme for reversing an action of a channel using semidefinite programming (SDP). In our case, the most useful formulation of a semidefinite program is as follows (after Watrous [14]).

A semidefinite program is a triple (Φ, A, B) where $\Phi : L(\mathcal{H}_1) \rightarrow L(\mathcal{H}_2)$ is a Hermiticity-preserving map and $A \in L(\mathcal{H}_1)$ and $B \in L(\mathcal{H}_2)$ are Hermitian operators for some choice of Hilbert spaces $\mathcal{H}_1$ and $\mathcal{H}_2$. Two optimization problems are associated with the triple (Φ, A, B) , the primal and dual problems. We will focus our attention on the primal problem, which has the form:

$$\begin{aligned} &\text{maximize:} && \text{tr}(AX), \\ &\text{subject to:} && \Phi(X) = B, \\ &&& X \geq 0. \end{aligned}$$

In the case of the pseudo-telepathy game, it seems appropriate to look for a channel in a product form. This is due to the fact, that Alice and Bob are separated and each of them must apply a local channel. To model this situation, let us take the Jmiołkowski representations of Alice's and Bob's channels, denoted Y and Z respectively. The resulting channel is given by

$$T = W(Y \otimes Z)W, \quad (17)$$

where W is an operator defined as follows

$$W = \mathbb{1}_{\mathcal{H}_2^A} \otimes U \otimes \mathbb{1}_{\mathcal{H}_1^B}, \quad (18)$$

where $U \in L(\mathcal{H}_1^A \otimes \mathcal{H}_2^B, \mathcal{H}_2^B \otimes \mathcal{H}_1^A)$ is the swap operation of subsystems $\mathcal{H}_1^A$ and $\mathcal{H}_2^B$, defined as

$$U = \sum_{i,j} |f_j e_i\rangle \langle e_i f_j|, \quad (19)$$

for e_i, f_j being elements of orthonormal bases of $\mathcal{H}_1^A$ and $\mathcal{H}_2^B$ respectively.

Next, let us denote by Ψ_N the noise channel and we put $\sigma = |\psi\rangle\langle\psi|$. For simplicity of further calculations, let us write $\tau = \Psi_N(\sigma)$ and $T = \mathcal{J}(\Psi_N)$. Consider the following maximization criterion problem

$$\text{maximize:} \quad \text{tr}(\text{tr}_2(W(Y \otimes Z)W(\mathbb{1} \otimes \tau^T))\sigma), \quad (20)$$

which means we aim to find a channel that reverses the action of the noise channel as accurately as possible. Unfortunately, a maximization criterion in this form does

not yield an SDP problem. To formulate this problem as an SDP, we first conduct some simple calculations that allow us to rewrite the maximization condition (20) as

$$\text{maximize: } \text{tr}((Y \otimes Z)M), \quad (21)$$

$$M = W(\sigma \otimes \tau)W. \quad (22)$$

Considering the value of Y to be fixed and using the equation $\text{tr}((\mathbb{1} \otimes A)B) = \text{tr}(A \text{tr}_1(B))$, allows us to write the following SDP program

$$\begin{aligned} \text{maximize: } & \text{tr}(Z \text{tr}_{\mathcal{H}_2^B, \mathcal{H}_1^B}(M(Y \otimes \mathbb{1}_{\mathcal{H}_2^B \otimes \mathcal{H}_1^B}))), \\ \text{subject to: } & \text{tr}_{\mathcal{H}_2^B}(Z) = \mathbb{1}_{\mathcal{H}_1^B}, \\ & Z \geq 0. \end{aligned} \quad (23)$$

Fixing the value of Z and following a similar calculation gives the following SDP problem

$$\begin{aligned} \text{maximize: } & \text{tr}(Y \text{tr}_{\mathcal{H}_2^A, \mathcal{H}_1^A}((\mathbb{1}_{\mathcal{H}_2^A \otimes \mathcal{H}_1^A} \otimes Z)M)), \\ \text{subject to: } & \text{tr}_{\mathcal{H}_2^A}(Y) = \mathbb{1}_{\mathcal{H}_1^A}, \\ & Y \geq 0. \end{aligned} \quad (24)$$

Now, we use the following algorithm to find an optimal channel. The algorithm in each iteration optimizes only a single part of the product channel. This algorithm was implemented using the SDPLR library [15, 16]

input : A random Jamiołkowski matrix [17], Y , the matrices W , σ , τ and the number of runs n

output: Optimized values of the parts of the product channel

calculate M ;

for $i \leftarrow 1$ **to** n **do**

$Z = \text{SolveSDP}(\text{Eqn. (23)}, Y, M)$;

$Y = \text{SolveSDP}(\text{Eqn. (24)}, Z, M)$;

end

return $W(Y \otimes Z)W$

Algorithm 1: SDP optimization of a product channel

VI. NUMERICAL RESULTS

Fig. 2 shows the results of the optimization scheme described in algorithm 1. The use of the SDP allowed us to achieve greater winning probability for all types of noisy channels.

In the case of the flip channels the obtained results are depicted in Figs. 2a, 2b and 2c. These plots show that it is possible to reverse the action of the noise channel for all values of the noise parameter α . Hence, we are able to observe quantum pseudo-telepathy for higher noise channels. Furthermore, the use of our optimization method results in a plot of probability of winning as a function of the noise parameter α which has a shape similar to the case when we do not try to reverse the action of a channel.

Next, we move to the depolarising channel. The results obtained in this case are shown in Fig. 2d. Likewise, in this case our method also has allowed us to achieve pseudo-telepathy for higher values of the noise parameter α . The details are depicted in the inset in Fig. 2d. Additionally, for values of the noise parameter $\alpha \geq 0.45$ the probability of winning the game stabilizes around 0.65, opposed to the case with no channel action inverse, where it drops to 0.5. Hence, we are able to retrieve some information in the case of high noise, local depolarising channels acting on many qubits.

Finally, we move to the damping channels. Numerical results for this case are depicted in Figs. 2e and 2f. Also in this case we are able to reverse the action of a noise channel and broaden the pseudo-telepathy region. In the case of high values of the noise parameter α , results for the amplitude damping channel resemble those obtained for depolarising channel, as the probability of winning stabilizes around 0.65 for $\alpha \geq 0.45$ instead of decreasing to around 0.5.

VII. CONCLUSIONS

We have proposed a method to reverse an action of a quantum channel using semidefinite programming. The method allows us to find a product channel which reverses a given channel. We use the following scheme to achieve this goal. First, we fix all parts of the product, except for one, which is being optimized. After the SDP optimization, we move on to optimize the next part of the product channel, using the value obtained in the earlier step. We repeat this for all parts of the product channel. We run the process many times to obtain a converging solution.

As an example of usage of this optimization scheme we present the quantum pseudo-telepathy magic square game. We obtained results showing an improvement in the possibility of winning the game. Specifically, we were to broaden the range of the noise parameter α for which the effect occurs. Finally, in the case of very noisy channel, our scheme raises the probability of winning well above a half, thus allowing us to retain at least some information about the initial state.

Acknowledgements

Work by Ł. Paweła was supported by the polish National Science Centre under the grant number N N516 481840. P. Gawron was supported by the polish Ministry of Science and Higher Education under the project number IP2011 014071. Work by Z. Puchała was supported by the polish Ministry of Science and Higher Education under the project number IP2011 044271. J. Ślaskowski was supported by the polish National Science Centre under the grant number UMO-2011/01/B/ST6/07197. Numerical calcula-

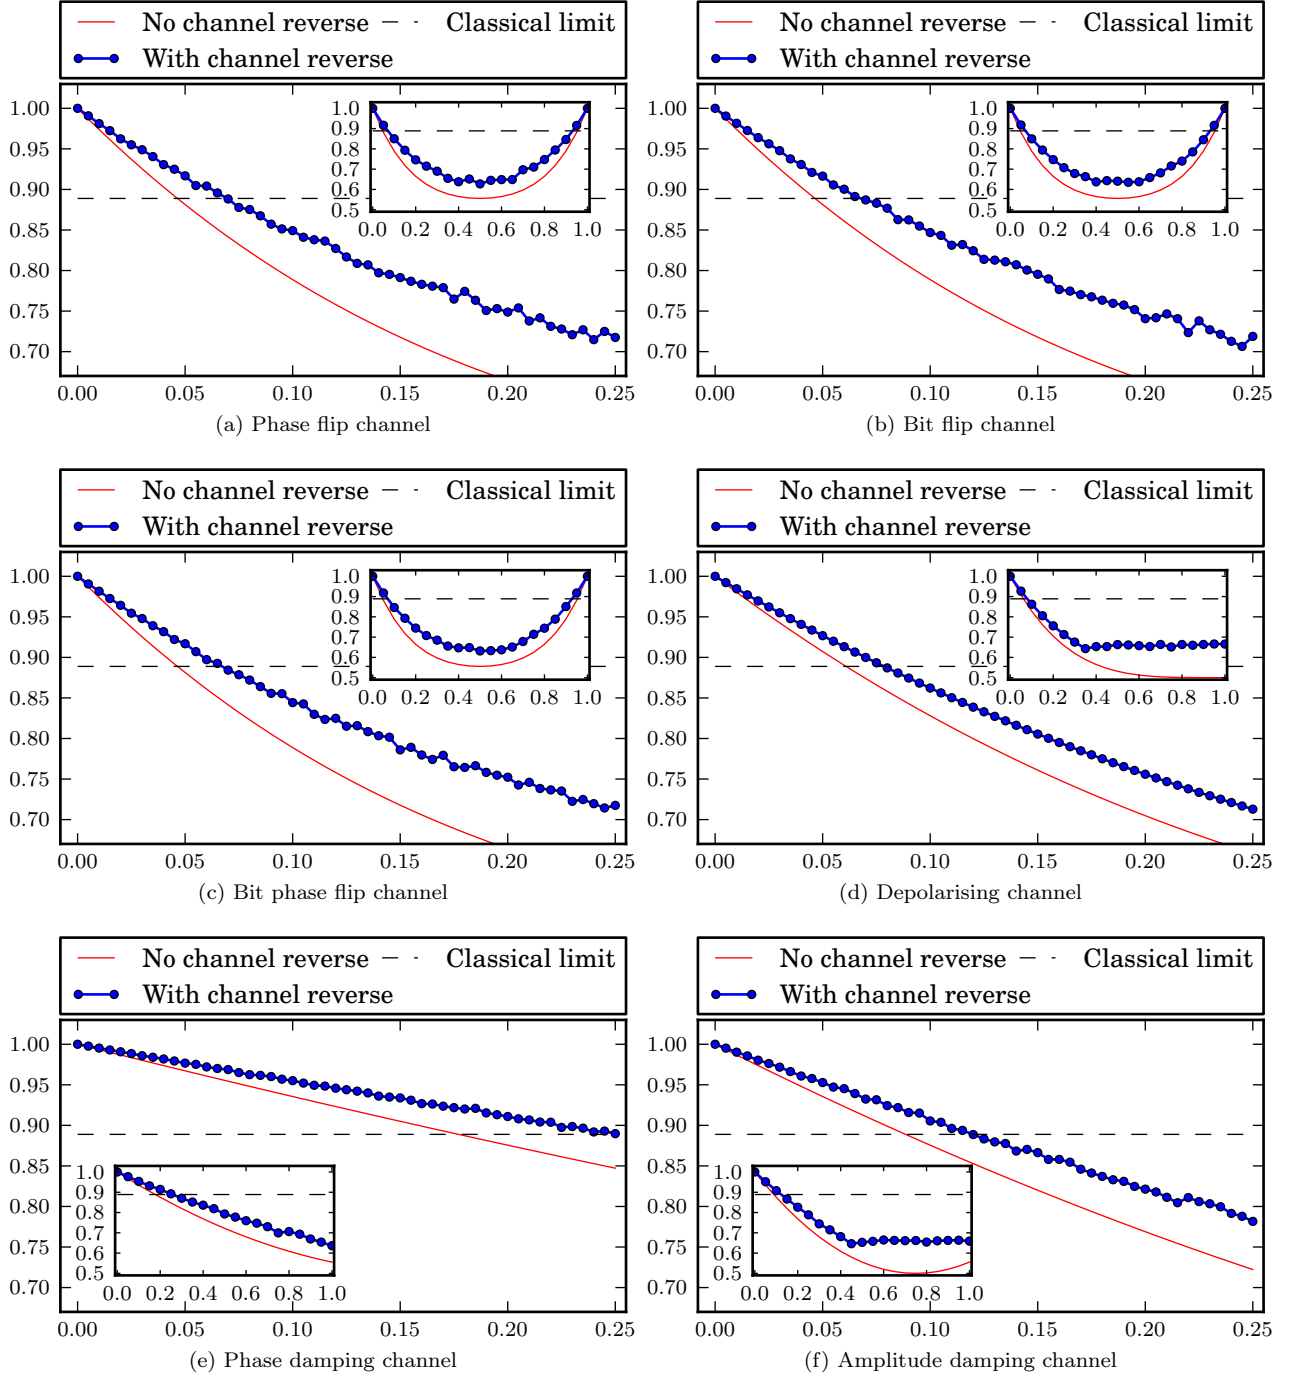


FIG. 2: Probability of winning the pseudo-telepathy game with and without the use of our approach as a function of the noise parameter α for different noise channels. Lines connecting the points are eye-guides. The insets show the probability of winning for $\alpha \in [0, 1]$.

tions presented in this work were performed on the Świs-tak server of The Institute of Theoretical and Applied

Informatics, Polish Academy of Sciences.

[1] J. Eisert, M. Wilkens, and M. Lewenstein, Physical Review Letters **83**, 3077 (1999).

[2] E. W. Piotrowski and J. Śladowski, International Jour-

- nal of Theoretical Physics **42**, 1089 (2003).
- [3] G. Brassard, A. Broadbent, and A. Tapp, Foundations of Physics **35**, 1877 (2005).
 - [4] P. Gawron, J. A. Miszczak, and J. Śładkowski, International Journal of Quantum Information **06**, 667 (2008), arXiv:0801.4848.
 - [5] E. Piotrowski and J. Śładkowski, Physica A: Statistical Mechanics and its Applications **387**, 3949 (2008).
 - [6] P. Gawron, Fluctuation and Noise Letters **9**, 9 (2010), arXiv:0907.1381.
 - [7] J. Miszczak, P. Gawron, and Z. Puchała, Quantum Information Processing **11**, 1571 (2012).
 - [8] P. Gawron, J. Klamka, and R. Winiarczyk, International Journal of Applied Mathematics and Computer Science **22**, 493 (2012), arXiv:1108.1915.
 - [9] N. Mermin, Physical Review Letters **65**, 3373 (1990).
 - [10] P. K. Aravind, American Journal of Physics **72**, 1303 (2004).
 - [11] I. Bengtsson and K. Życzkowski, *Geometry of Quantum States. An Introduction to Quantum Entanglement* (Cambridge University Press, 2006).
 - [12] M. A. Nielsen and I. L. Chuang, *Quantum Computation and Quantum Information* (Cambridge University Press, 2000).
 - [13] Z. Puchała, J. Miszczak, P. Gawron, and B. Gardas, Quantum Information Processing **10**, 1 (2011), 10.1007/s11128-010-0166-1.
 - [14] J. Watrous, “Theory of quantum information,” published online (2011).
 - [15] S. Burer and R. D. C. Monteiro, Mathematical Programming **95**, 329 (2003).
 - [16] S. Burer and R. D. C. Monteiro, Mathematical Programming **103**, 427 (2005).
 - [17] W. Bruzda, V. Cappellini, H. Sommers, and K. Życzkowski, Physics Letters A **373**, 320 (2009).